arXiv:1110.2907v1 [cs.SY] 13 Oct 2011

SYSTEM IDENTIFICATION USING REWEIGHTED ZERO ATTRACTING LEAST ABSOLUTE DEVIATION ALGORITHM

Fuxi Wen, Boon Poh Ng

INFINITUS, School of EEE, Nanyang Technological University, Singapore
wenfuxi@ntu.edu.sg, ebpng@ntu.edu.sg

ABSTRACT

We propose a reweighted zero attracting least absolute deviation algorithm. The reweighted l_1 norm penalty on the filter coefficients is incorporated in the least mean absolute deviation (LAD) algorithm to improve the performance of the LAD algorithm. The performance of LAD, zero-attracting LAD (ZA-LAD) and reweighted zero attracting least absolute deviation (RZA-LAD) are evaluated for linear time varying system identification under the non-Gaussian (α-stable) noise environments. Effectiveness of the RZA-LAD algorithm is demonstrated through computer simulations.

Index Terms**—** LAD, ZA-LAD, RZA-LAD, sparse system identification, l_1 norm, α-stable noise

1. INTRODUCTION

Adaptive filters have been widely used in channel equalization, echo cancellation, noise cancellation, linear prediction and system identification. Least mean squares (LMS), recursive least squares (RLS) and their variations are the widely used adaptive algorithms. Compared to recursive least squares (RLS) algorithm, the LMS algorithm has a slower convergence speed, however the implementation of the LMS algorithm also is less complicated than the RLS algorithm.

In many applications, the unknown system response can be assumed to be sparse, only a small fraction of the coefficients are different from zero. Zero-attracting filters exploiting the sparse nature of the system can improve the performance of adaptive filters. Motivated by LASSO [1] and recent progress in compressive sensing [2], the zero-attracting LMS (ZA-LMS) algorithm and reweighted zero-attracting LMS (RZA-LMS) were proposed in [3], for sparse system identification. ZA-LMS is a combination of LMS algorithm with l_1-norm penalty of the coefficient vector. The reweighted l_1 minimization algorithm is first proposed in [4] to enhance the sparsity of the system.

The LMS type algorithms generally provide a more accurate solution, less misadjustment when the noise is Gaussian, however, LMS is very sensitive to the presence of outliers. Although the convergence rate of the least mean absolute deviation type algorithms is low, they are robust to the presence of outliers, such as the α-stable noise. The α-stable noise model is a more generalized model [5, 6], such that the Gaussian model can be seen as an special case of α-stable model by setting the characteristic exponent $\alpha = 2$.

In this paper, the performance of least mean absolute deviation (LAD) [5], zero-attracting LAD (ZA-LAD) [7] and reweighted zero-attracting LAD (RZA-LAD) are evaluated for linear time varying system identification under the non-Gaussian (α-stable) noise environments. The coefficients are updated using fixed step size.

The rest of the paper is organized as follows. The RZA-LAD algorithm is given in Section II. In Section III, we evaluate the performance of the three algorithms for linear time varying system identification under Gaussian and non-Gaussian noise environments. Conclusions of our work and some further research directions are provided in Section IV.

Notations: Matrices and vectors are denoted by boldface upper case letters and boldface lower case letters, respectively. $\mathbf{x}(n)$ is the system input signal at time n, $\mathbf{w}(n)$ is the coefficient vector and $d(n)$ is the desire signal at time n, The superscripts $(\cdot)^T$ denotes the transpose and sgn$(\cdot)$ denotes the sign function. $|\cdot|$ and $||\cdot||_1$ denote the absolute value and l_1 norm, respectively. The mth element of a column vector is denoted by $[\cdot]_m$. $\mathcal{R}$ represents the set of all real numbers.

2. THE RZA-LAD ALGORITHM

2.1. Review of LAD and ZA-ALD algorithms

The output of the LAD algorithm is given by

$$y_1(n) = \mathbf{w}_1^T(n)\mathbf{x}(n). \tag{1}$$

The cost function is formulated as

$$J_1\big(\mathbf{w}_1(n)\big) = |d(n) - y_1(n)| = |e_1(n)|\,, \tag{2}$$

where $e_1(n) = d(n) - y_1(n)$ is the error signal.

Using the stochastic gradient approach, the filter weights are estimated iteratively by

$$\mathbf{w}_1(n+1) = \mathbf{w}_1(n) - \mu_1 \frac{\partial J_1\big(\mathbf{w}_1(n)\big)}{\partial \mathbf{w}_1(n)}, \tag{3}$$

where

$$\frac{\partial J_1\big(\mathbf{w}_1(n)\big)}{\partial \mathbf{w}_1(n)} = -\mathrm{sgn}\big(e_1(n)\big)\mathbf{x}(n). \tag{4}$$

Substituting (4) into (3), we obtain the updating equation for the LAD algorithm:

$$\mathbf{w}_1(n+1) = \mathbf{w}_1(n) + \mu_1 \mathrm{sgn}\big(e_1(n)\big)\mathbf{x}(n), \tag{5}$$

where μ_1 is the step size that should be chosen carefully to ensure convergence.

The output of the ZA-LAD algorithm is

$$y_2(n) = \mathbf{w}_2^T(n)\mathbf{x}(n). \tag{6}$$

For the ZA-LAD algorithm, l_1 norm penalty is used to explore the sparse nature of the filter coefficients. The cost function is formulated as

$$\begin{aligned} J_2\big(\mathbf{w}_2(n)\big) &= |d(n) - y_2(n)| + \alpha_2 \left|\left|\mathbf{w}_2(n)\right|\right|_1 \\ &= |e_2(n)| + \alpha_2 \left|\left|\mathbf{w}_2(n)\right|\right|_1, \end{aligned} \tag{7}$$

where $e_2(n) = d(n) - y_2(n)$ is the error signal, α_2 is regularization parameter.

Using the stochastic gradient approach, the filter weights are estimated iteratively by

$$\mathbf{w}_2(n+1) = \mathbf{w}_2(n) - \mu_2 \frac{\partial J_2\big(\mathbf{w}_2(n)\big)}{\partial \mathbf{w}_2(n)}, \tag{8}$$

where

$$\frac{\partial J_2\big(\mathbf{w}_2(n)\big)}{\partial \mathbf{w}_2(n)} = -\mathrm{sgn}\big(e_2(n)\big)\mathbf{x}(n) + \alpha_2 \mathrm{sgn}\big(\mathbf{w}_2(n)\big). \tag{9}$$

Substituting (9) into (8), we obtain the updating equation for the ZA-LAD algorithm:

$$\mathbf{w}_2(n+1) = \mathbf{w}_2(n) + \mu_2 \mathrm{sgn}\big(e_2(n)\big)\mathbf{x}(n) - r_2 \mathrm{sgn}\big(\mathbf{w}_2(n)\big), \tag{10}$$

where μ_2 is the stepsize and $r_2 = \mu_2\alpha_2$.

2.2. The RZA-LAD algorithm

The output of the RZA-LAD algorithm is

$$y_3(n) = \mathbf{w}_3^T(n)\mathbf{x}(n). \tag{11}$$

Compared with l_1 norm, log-sum penalty function is a better approximation for the sparsity of the filter coefficients. For the RZA-LAD algorithm, log-sum penalty function is used as the coefficient penalty function. The cost function is formulated as

$$\begin{aligned} J_3\big(\mathbf{w}_3(n)\big) &= |d(n) - y_3(n)| + \alpha_3 \sum_{m=1}^{M} \log\left(1 + \varepsilon_3\big|[\mathbf{w}_3(n)]_m\big|\right) \\ &= |e_3(n)| + \alpha_3 \sum_{m=1}^{M} \log\left(1 + \varepsilon_3\big|[\mathbf{w}_3(n)]_m\big|\right), \end{aligned} \tag{12}$$

where $e_3(n) = d(n) - y_3(n)$ is the error signal, α_3 is the regularization parameter, ε_3 is a positive number and M is the number of elements in weight vector $\mathbf{w}_3(n)$.

Using the stochastic gradient approach, the filter weights are estimated iteratively by

$$\mathbf{w}_3(n+1) = \mathbf{w}_3(n) - \mu_3 \frac{\partial J_3\big(\mathbf{w}_3(n)\big)}{\partial \mathbf{w}_3(n)}, \tag{13}$$

and

$$\frac{\partial J_3\big(\mathbf{w}_3(n)\big)}{\partial \mathbf{w}_3(n)} = -\mathrm{sgn}\big(e_3(n)\big)\mathbf{x}(n) + \alpha_3\varepsilon_3\mathbf{g}(n). \tag{14}$$

where $\mathbf{g}(n) \in \mathcal{R}^{M\times 1}$ and the mth element of $\mathbf{g}(n)$ is given by

$$\big[\mathbf{g}(n)\big]_m = \frac{\mathrm{sgn}\big([\mathbf{w}_3(n)]_m\big)}{1 + \varepsilon_3\big|[\mathbf{w}_3(n)]_m\big|}, 1 \le m \le M. \tag{15}$$

Substituting (14) into (13), we obtain the updating equation for the RZA-LAD algorithm. The updating equation is given by

$$\mathbf{w}_3(n+1) = \mathbf{w}_3(n) + \mu_3 \mathrm{sgn}\big(e_3(n)\big)\mathbf{x}(n) - r_3\mathbf{g}(n), \tag{16}$$

where μ_3 is the stepsize and $r_3 = \mu_3\alpha_3\varepsilon_3$ and $\mathbf{g}(n)$ is given in (15).

3. PARAMETER SELECTION A BRIEF DISCUSSION

The ZA-LAD and RZA-LAD algorithms are regularization based adaptive algorithms. For the regularization based adaptive algorithms, the cost function is defined by combining the the l_p norm of the error signal with the l_q norm penalty of the coefficient vector.

Regularization plays a fundamental role in adaptive filtering, however the better performance is not obtained if the regularization parameter r is not choosing properly. According to (10) and (16), the parameter r denotes the importance of the l_1 norm term or the intensity of attraction. So a large r results in a faster convergence since the intensity of attraction increases as r increases. However, steady-state misalignment increases as r increases. Therefore, the parameter r are determined by the trade-off between adaptation speed and adaptation quality in particular applications.

One possible way to find the optimal regularization parameter α for four LMS-type algorithms is given in [8]. The performance of the regularization based algorithms may be improved by using a adaptive regularization factor. To verify the performance of the LAD type algorithms, a fixed regularization factor is used.

We introduce the parameter $\varepsilon > 0$ in (12) in order to provide stability and to ensure that a zero-valued component in $\mathbf{w}(n)$ does not strictly prohibit a nonzero estimate at the next step. As empirically demonstrated in Section IV part A, the

RZA-LAD algorithm is robust to the choice of ε. As mentioned in [4], ε should be set slightly smaller than the expected nonzero magnitudes of $\mathbf{w}(n)$.

4. SIMULATIONS

In this section, the performance of the proposed method is assessed via computer simulations. For comparison purposes, we also implement the LMS, RZA-LMS and ZA-LMS algorithms. Mean square deviation (MSD) is taken as a metric, which is defined as

$$MSD = \frac{1}{K}\sum_{k=1}^{K} ||\mathbf{w}^{(k)} - \mathbf{w}_o||_2^2. \tag{17}$$

where $\mathbf{w}^{(k)}$ is the coefficient estimated in the k th independent tries and $\mathbf{w}_o$ is the real coefficient of the system.

The noise is impulsive with a α-stable distribution. The characteristic exponent $\alpha = 1.2$, the symmetry parameter $\beta = 0$, the location parameter $\gamma = 0$ and the dispersion (also called the scale) $\delta = 1$. All the simulation results are obtained by running 500 times independently. The parameters are given in Table 1.

Table 1. Simulation parameters

Algorithms	μ	r	ε
LAD	5×10^{-3}		
ZA-LAD	5×10^{-3}	1.5×10^{-4}	
RZA-LAD	5×10^{-3}	1.5×10^{-3}	1×10^{-2}
LMS	5×10^{-3}		
ZA-LMS	5×10^{-3}	1.5×10^{-4}	
RZA-LMS	5×10^{-3}	1.5×10^{-3}	1×10^{-2}

To verify the robustness of parameter ε, the following experiment is considered. A linear time invariant system with 16 coefficients is considered. Initially, we set the $5th$ tap with value 1 and the others to zero, making the system have a sparsity of 1/16. The performance of LAD, ZA-LAD and RZA-LAD with different ε is compared when the input signal is a white Gaussian random sequence with variance of 1. The average MSD is shown in Fig.1.

From Fig.1, we can see that, the performance of ZA-LAD and RZA-LAD is similar when $\varepsilon = 0.001$ is used. It is because for a small ε, $\varepsilon\,|\mathbf{w}_3(n)| \approx 0$. The update functions for ZA-LAD (10) and RZA-LAD (16) are equivalent, then the RZA-LAD algorithm reduces to the conventional ZA-LAD algorithm. Compared with LAD and ZA-LAD, better steady-state performance is obtained for the RZA-LAD algorithm when $\varepsilon = 0.01, 0.1, 1, 10$, respectively. Another observation is that, the convergence rate of RZA-LAD is slower when a larger ε is used. It is because, ε is in the denominator part of the third term of the RZA-LAD update function (16). A larger ε will make the step-size in the third term of (16) becoming smaller. The convergence rate is slower due to the relatively smaller step-size.

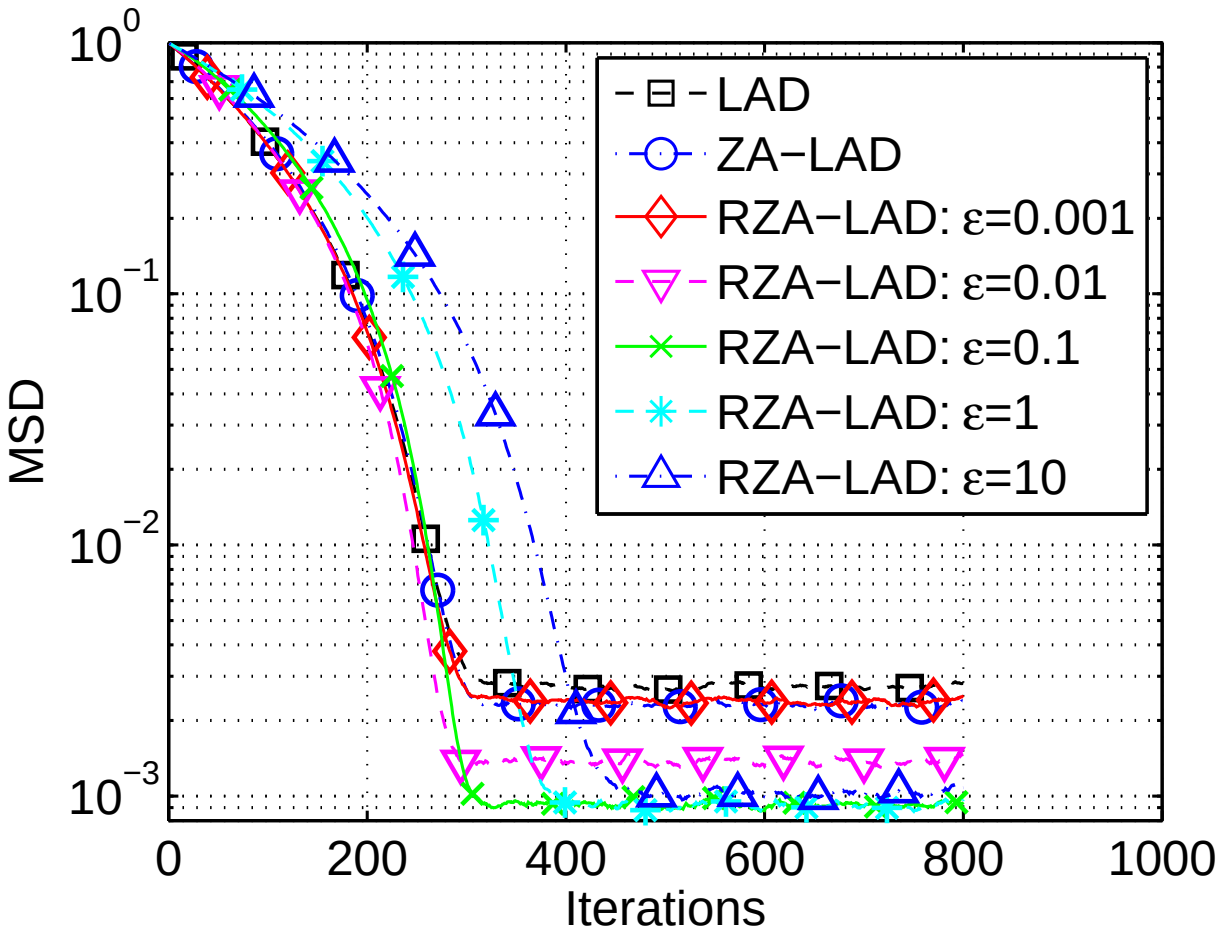

Fig. 1. Robustness of parameter ε. Gaussian input signal and impulsive noise with α stable distribution.

In the second experiment, similar to the simulation setup used in [3]. A linear time varying system with 16 coefficients is considered. Initially, we set the $5th$ tap with value 1 and the others to zero, making the system have a sparsity of 1/16. After 3000 iterations, all the odd taps are set to 1, while all the even taps remains to be zero, i.e., a sparsity of 8/16. After 6000 iterations all the even taps are set with value -1 while all the odd taps are maintained to be 1, leaving a completely non-sparse system. White Gaussian input signal and impulsive noise with α stable distribution. The average MSD is shown in Fig.2.

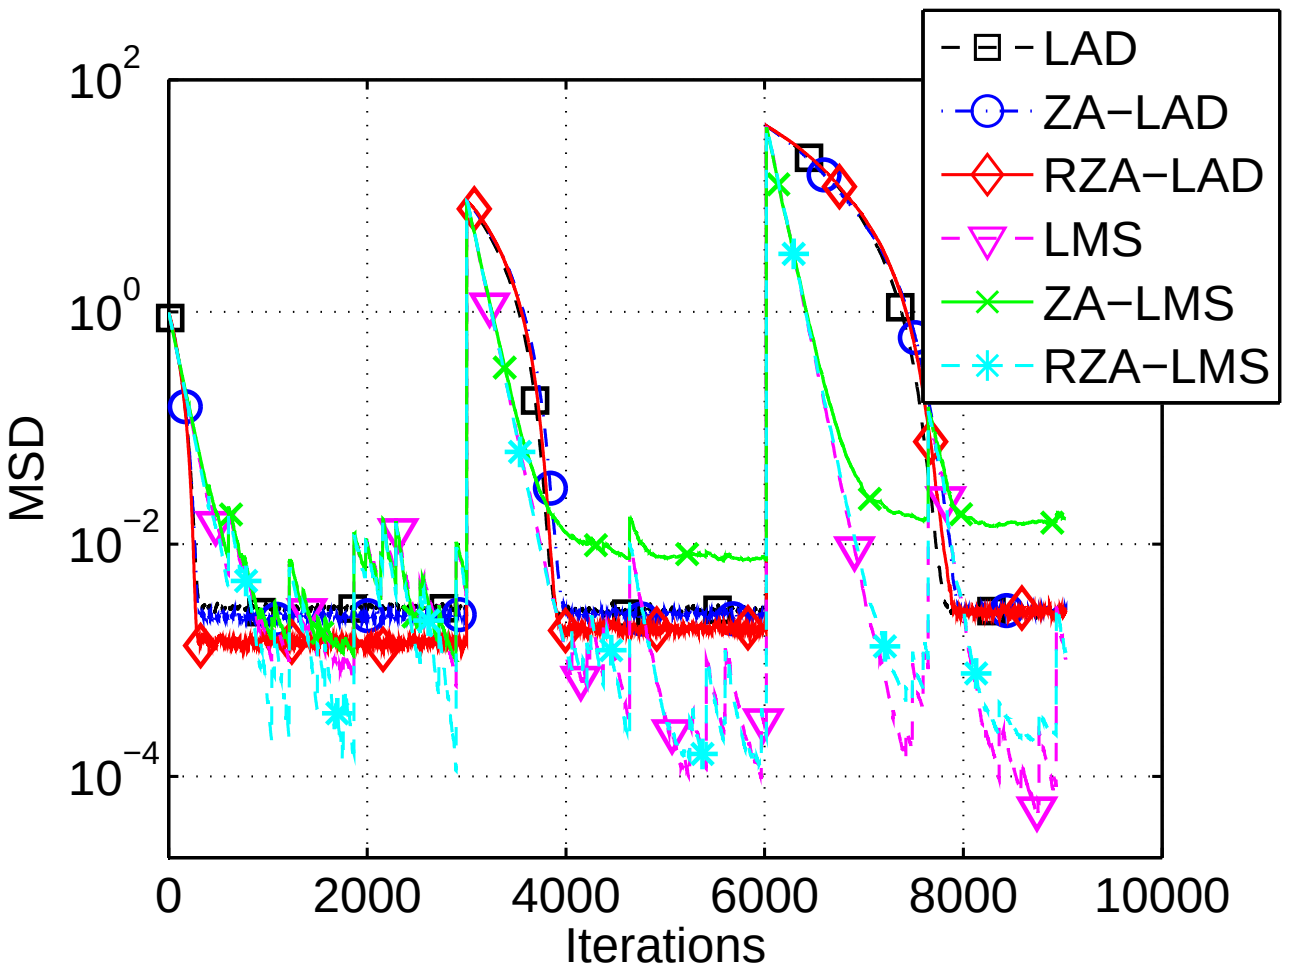

Fig. 2. Gaussian input signal and impulsive noise with α stable distribution.

From Fig.2 we can see that, when the system is very sparse (before the 3000th iterations), RZA-LAD yields fastest convergence rate and best steady-state performance compared with LAD and ZA-LAD. And the MSD of the LAD and ZA-LAD algorithms are similar. After the 3000th iteration, as the number of non-zero efficients increases to eight, a similar performance is obtained for LAD and ZA-LAD, while the RZA-LAD algorithm maintains the best performance among the three algorithms. After 6000th iterations, the system is completely non-sparse, the performance of all the three algorithms are similar. Since the impulsive noise is considered, all the three LMS type algorithms are not converged.

The system in the third experiment is the same as the second one, except the switching times are set to the 20000 th iteration and 40000 th iteration, respectively. The input signal $x(n)$ is now a correlated signal generated by $x(n) = 0.8x(n-1) + u(n)$, where $u(n)$ is a white Gaussian noise. The average MSD is shown in Fig.3.

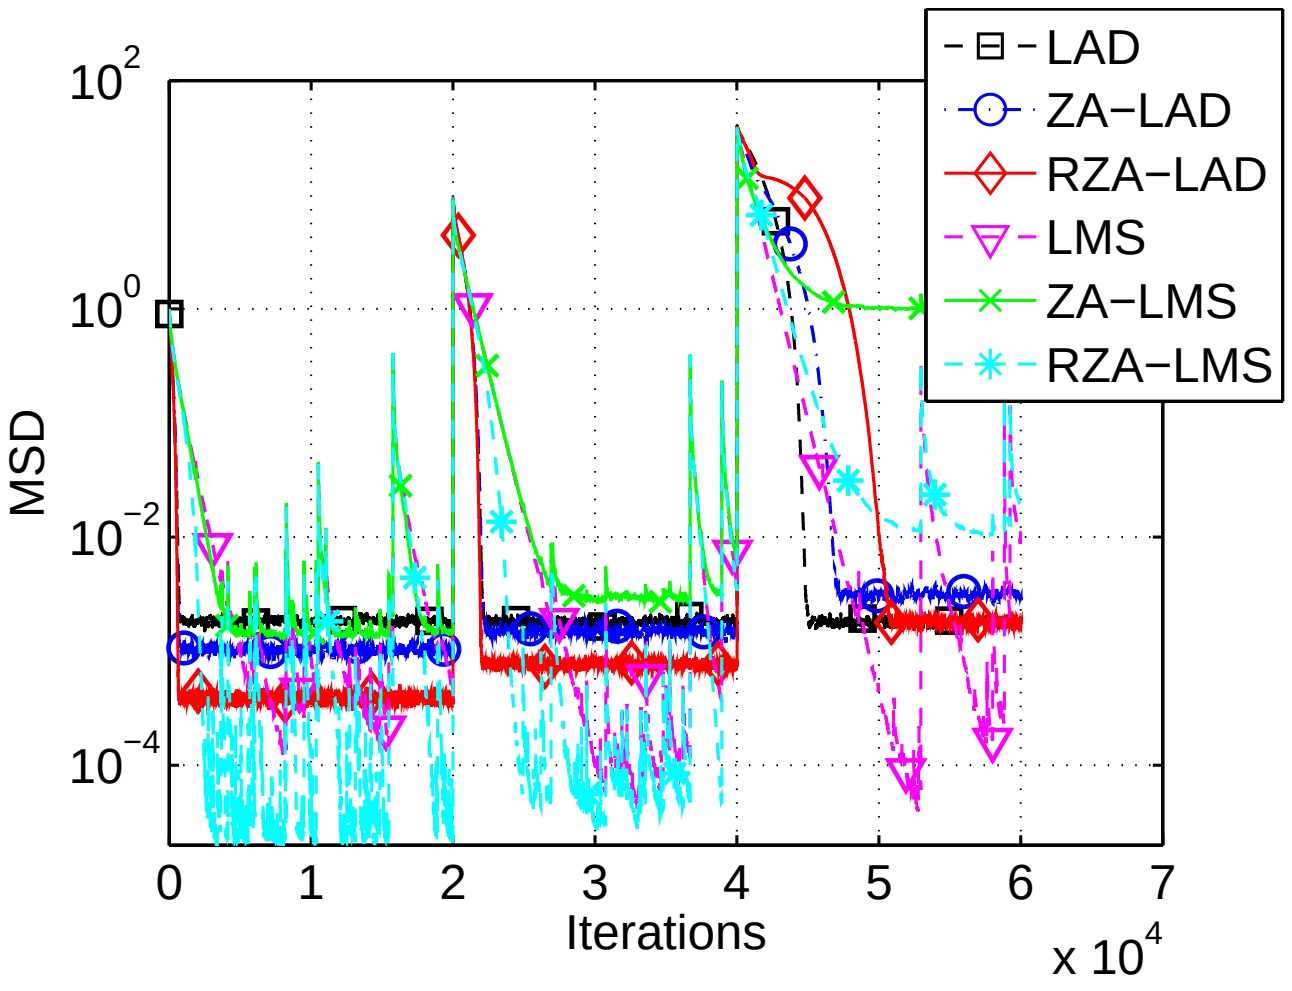

Fig. 3. Correlated input signal and impulsive noise with α stable distribution.

From Fig.3 we can see that, when the system is very sparse (before the 20000th iterations), both ZA-LAD and RZA-LAD yield faster convergence rate and better steady-state performance than LAD. And the MSD of the RZA-LAD algorithm is lower than the ZA-LAD algorithm. After the 20000th iteration, as the number of non-zero efficients increases to eight, the performance of the ZA-LAD deteriorated, a similar performance is obtained for LAD and ZA-LAD, while the RZA-LAD algorithm maintains the best performance among the three algorithms. After 40000th iterations, the system is completely non-sparse, the performance of the LAD and RZA-LAD algorithms are similar. The convergence rate of the RZA-LAD algorithm is low compared with LAD. All the three LMS type algorithms are still not converged due to the impulsive noise.

5. CONCLUSION

In this paper, the performance of LAD, ZA-LAD and RZA-LAD are evaluated for linear time varying system identification under the Gaussian and non-Gaussian (α-stable) noise environments. Better performance is obtained for the ZA-LAD type algorithms by exploiting the sparse nature of the system. RZA-LAD performs best among all the three algorithms, even when the system is non-sparse. Furthermore, the ZA-LAD type algorithms are robust to the non-Gaussian noise with α-stable distribution.

There are two potential future works, the first one is evaluating the performance of RZA-LAD algorithm using variable step size and automatically adapted regularization parameters to ensure reliable performance across a broad array of signals. The second one is extending the RZA-LAD algorithm to nonlinear system such as nonlinear system identification using Volterra filter.

6. REFERENCES

[1] Robert. Tibshirani, "Regression shrinkage and selection via the lasso," *J. Roy. Statist. Soc. Ser. B*, vol. 58, no. 1, pp. 267–288, 1996.

[2] R. G. Baraniuk, "Compressive sensing," *IEEE Signal Processing Magazine*, vol. 24, no. 4, pp. 118–121, 2007.

[3] Yilun Chen, Yuantao Gu, and A. O. Hero, "Sparse lms for system identification," in *Proc. ICASSP*, 2009, pp. 3125–3128.

[4] M. B. Candes, E. J. Wakin and Stephen. P. Boyd, "Enhancing sparsity by reweighted l1 minimization," *Journal of Fourier Analysis and Applications*, vol. 14, no. 5, pp. 877–905, 2008.

[5] M. Shao and C. L. Nikias, "Signal processing with fractional lower order moments: stable processes and their applications," *Proceedings of the IEEE*, vol. 81, no. 7, pp. 986–1010, 1993.

[6] Binwei Weng and K. E. Barner, "Nonlinear system identification in impulsive environments," *IEEE Transactions on Signal Processing*, vol. 53, no. 7, pp. 2588–2594, 2005.

[7] M. S. O'Brien, A. N. Sinclair, and S. M. Kramer, "High resolution deconvolution using least-absolute-values minimization [us nde]," in *Proc. Ultrasonics Symp. IEEE 1990*, 1990, pp. 1151–1156.

[8] J. Benesty, C. Paleologu, and S. Ciochina, "On regularization in adaptive filtering," *IEEE Transactions on Audio, Speech, and Language Processing*, vol. 19, no. 6, pp. 1734–1742, 2011.